

PEM Electrolysis

HyAxiom PEM Water Electrolysis products provide high power density and scalable technology that connect to renewable power resources to generate 100% green hydrogen

Flexible Operating Modes

Load following and demand following operating modes are available

Remote Monitoring & Control

Industry leading remote monitoring and data analytics maximize product efficiency and uptime

Modular & Scalable

Hydrogen and water processing equipment and installations that scale with application needs

SYSTEM HIGHLIGHTS

HYDROGEN PRODUCTION

| H ₂ Production Rate | .431.5 kg/day (200 Nm ³ /hr at 0°C, 1 atm) |
|---------------------------------|---|
| System Efficiency @ BOL | 57.0 kWh/kg H ₂ (69.2% HHV) |
| H ₂ Product Purity | |
| H ₂ Product Pressure | 30 barg |



OPERATING CHARACTERISTICS

| Start Time from Standby<5 mins |
|--------------------------------|
| Ramp Time to Full Capacity |
| Turndown Capability |

ENVIRONMENTAL CHARACTERISTICS

Ambient Operating Temp -20°C to 40°C (option for 50°C)

WATER MANAGEMENT CHARACTERISTICS

| Water Supply QualityPo | otable | Water |
|------------------------|--------|-------|
| Water Consumption | . <4.5 | L/min |
| Water Discharge | . <1.6 | L/min |


SITE ELECTRICAL INTERFACES


CODES AND STANDARDS

ISO 22734: Hydrogen generators using water electrolysis ANSI/CSA B22734 (planned): Hydrogen generators using water electrolysis

SYSTEM DIMENSIONS

HyAxiom, Inc.

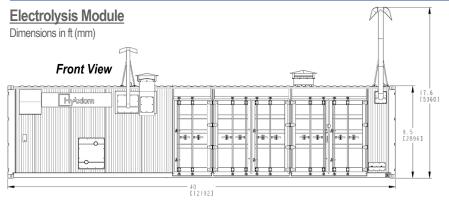


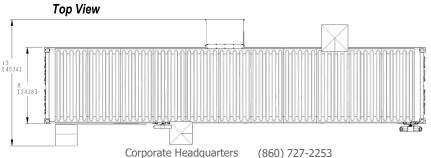

101 East River Drive


East Hartford, CT 06108

Cooler Module (Glycol Coolant)





Chiller Module (Glycol Coolant)

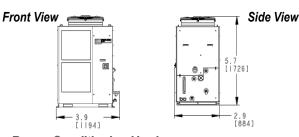

Power Conditioning Hardware

| Transformer | 10.5 (3200) W x 4.7 (1422) L x 8.5 (2578) H |
|--------------|--|
| Rectifier | . 3.3 (1000) W x 5.4 (1635) L x 7.3 (2225) H |
| Switchgear | 3 (914) W x 4 (1207) L x 7.6 (2324) H |
| DC Enclosure | 3 (914) W x 1.1 (325) L x 6 (1829) H |

The manufacturer reserves the right to change or modify, without notice, the design or equipment specifications without incurring any obligation either with respect to equipment previously sold or in the process of construction. The manufacturer does not warrant the data on this document.

email: sales@doosan.com

www.hyaxiom.com